


Performance Tapes **Application Bulletin**

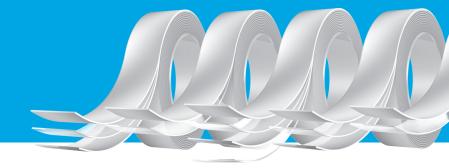

Box Closure Tapes

Double coated PET tapes featuring an aggressive rubber based adhesive on both sides engineered to bond to a wide variety of cardboard materials with varying degrees of recycled content.

FEATURES

- Adhesive performs in temperatures between -40°F up to 225°F (-40°C up to 107°C)
- Custom liner with one color imprinting for brand identification
- Polyester carrier cuts easily for processing during fabrication and assembly
- Densified kraft liner removes smoothly and easily for the end user
- Year round adhesive performance from a single tape solution
- High adhesive coat weight options for bonding to cardboard with high recycled content




PRODUCTS

Product	Adhesive Coat Weight	Standard Finish*	Applications
FT 8368	3.0 mil	Full Coverage	POP displays, general use
FT 8413	5.0 mil	Fingerlift Edge	Unvarnished clay coated boxes
FT 9325	6.0 mil	Fingerlift Edge	Varnished or Linerboard box
FT 8455	7.0 mil	Extended Liner	T-mailers, liner overhang edges

^{*}All products are available in any finish option. Please contact your sales representative for specific order requirements.

AVAILABLE FINISH OPTIONS



Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation.

All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation



Performance **Tapes**

Asia Pacific

NO. 618 Nanhe Road Kunshan Economic & Technological Zone China 215335

Phone: +86 512 57155001 Fax: +86 512 57155059

Europe Tieblokkenlaan 1

B-2300 Turnhout Belgium

Phone: +32 (0)14 40 48 11 Fax: +32 (0)14 40 48 55

North America

250 Chester Street Painesville, Ohio 44077 USA Phone: +1 866-462-8379

Fax: +1 888-358-4469